

How to flash a ROM on your BV8000 Pro:

Why flashing?


- Update or Downgrade your phone
- Fix Bugs or Bootloop on your phone
- Unbrick your phone if it's bricked

Preparation: What do you need?

- Smartphone Blackview BV8000 Pro (Battery loaded 70% or more)
- A Computer with Windows XP or above (Linux is possible but this Tutorial is for Windows)
- ROM for BV8000 Pro – Official ROMs will be announced here:
<http://bbs.blackview.hk/viewforum.php?f=182> – download and unpack .zip file
(You could use software like JDownloader 2 to download and unpack from Mega.nz without problems)
- The Software “MTK SP Multi Port Download Tool” - download and extract to your Hard drive
Version V3.1712.01: [Link](#). (Alternative Version, try if you have issues: [Link](#))
- Checksum Generator - copy the entire content of the folder inside the ROM-folder with the scatter file, then run CheckSum_Gen.exe [Download link](#)
- VCOM driver – <https://www.google.com/search?q=MT67xx+USB+VCOM+DRIVERS>
Install the drivers. For Windows 8 or newer, you may have to disable “Driver Signature Verification”. Restart the Computer after Driver installation. Check Windows Device Manager to be sure Driver is installed correct.

Ready! What to do now?

- If possible create a Backup of your personal data which is stored on the phone.
- Power off your phone and disconnect it from the computer
- Start the software by running SPMultiPortFlashDownloadProject.exe. This is what you will see:

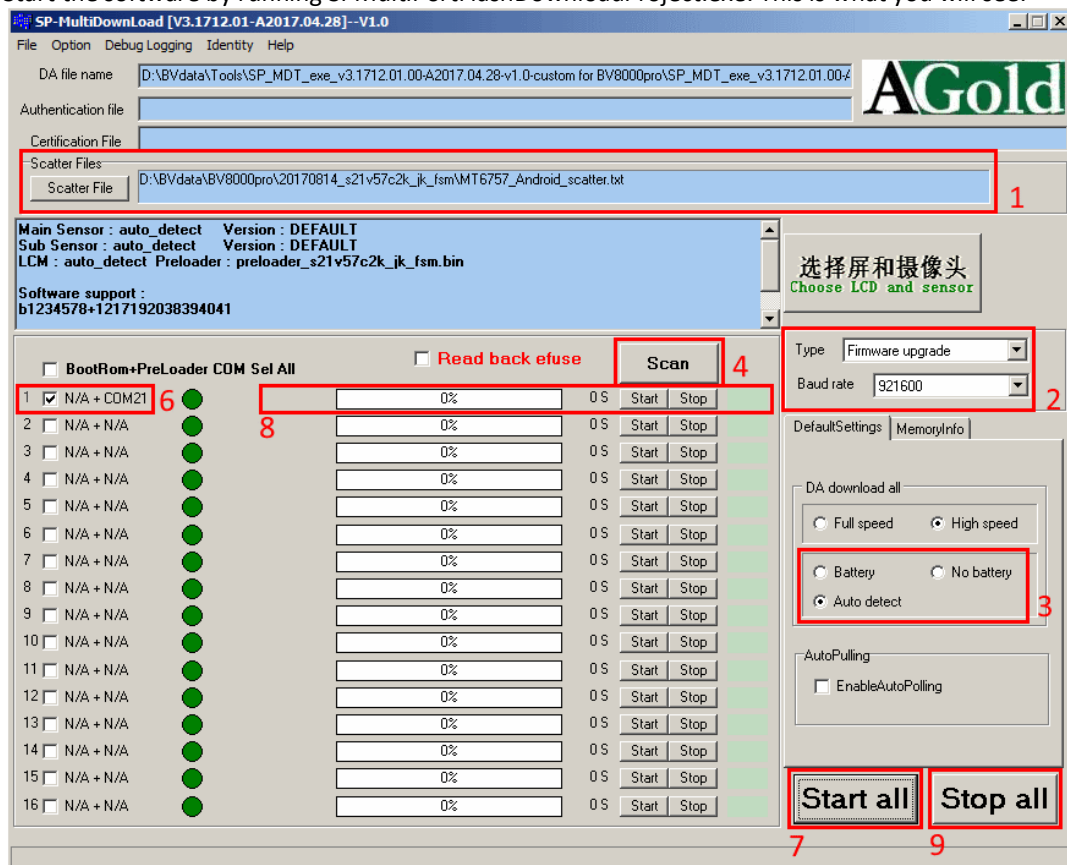

- 1) Select the scatter file which is located in your downloaded, unzipped Firmware Folder
- 2) Select “Firmware update”
- 3) Select “Auto detect”
- 4) Press Scan to let the Tool search the correct COM-Port
- 5) Press Phones volume-up-key while connecting it (powered off) to your Computer. Use original cable.
- 6) Used COM-Port should be listed and selected in list on left side now. Remove phone from cable.
- 7) Press “Start all”. Press Phones volume-up-key while connecting it again.
- 8) Wait until it's finished. Status should change to DL OK, PASS. Don't do anything until this happen.
- 9) Press “Stop all”. Unplug the phone. Wait some seconds and start your phone.